



nueva colección  
new collection

2020







Let's get brighter



## Entender la esencia de cada uno, es emprender un viaje.

El nuestro empieza y acaba en esta orilla del Mediterráneo.  
Lugar y gente de costa que se echa a la mar. Mira lejos. Y lleva  
su saber a otros puertos.  
Y entre esa gente: esta familia. Porque, ante todo, somos eso.  
Familia. Por legado y por actitud.

## Understanding the essence of each one is to undertake a journey.

Ours begins and ends on this shore of the Mediterranean.  
Where the light shines with a special purity and intensity, lighting  
everything extremely clearly and flawlessly. We take this knowledge to  
other ports, other people.  
And among those people: this family. Because, above all, we are that.  
Family. By legacy and by attitude.

BPM Lighting

ALBERTA INSIDE

La J



**BPM**Lighting®

Let's get brighter

Perfección  
tiene forma circular.



ALBERTA DUE


Perfection  
has a circular shape.



ALBERTA INSIDE




OKKO

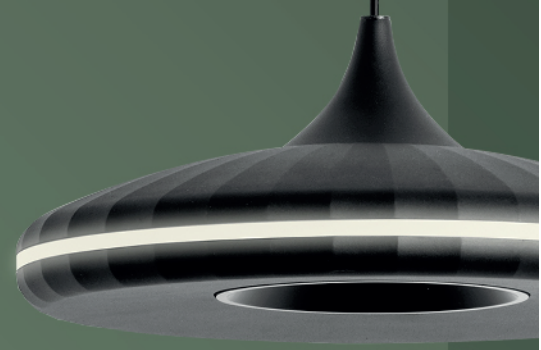

# Luminarias Co Stat

SUBLIM  
composition

SUBLIM  
two sizes

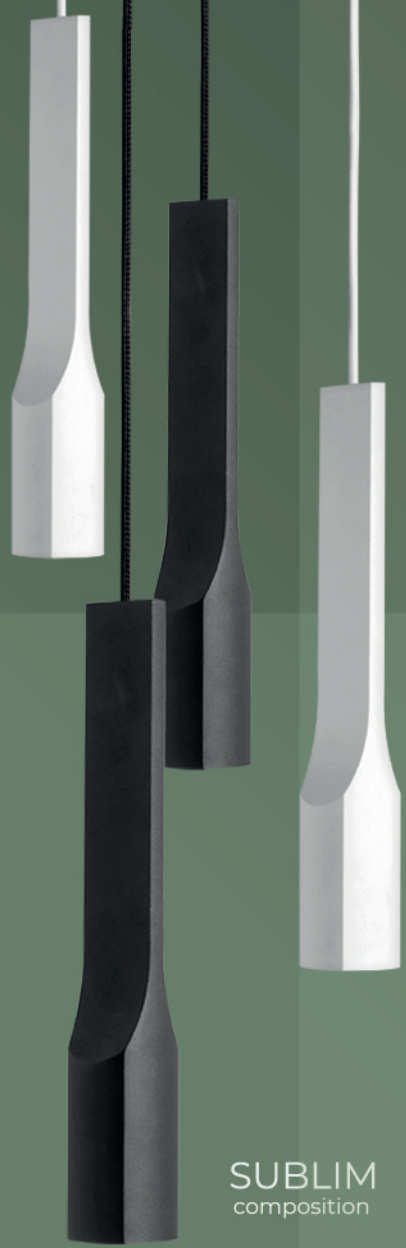

KIERA



IRIS



FACE

# Pendantes de Vanguardia State-of-the-Art Pendant Lights



Let's get brighter

KIERA CEM



GALANTA







Creando nuevas formas  
Creating new forms



**BPM**Lighting®

Let's get brighter



formas de iluminar.  
new ways of lighting



## ALARIK SLIM

Infinitas posibilidades en versión mini  
Infinite possibilities in mini version





# La Experiencia Outdoor

Los espacios al aire libre destacarán con piezas únicas diseñadas para que la luz se disipe armoniosamente, como parte de una pieza integrada en el ambiente.


# The Outdoor Experience

The outdoor spaces will stand out with unique pieces designed to diffuse the light harmoniously, as part of a single unit integrated into the surrounding.



**BPM**Lighting®


Let's get brighter




**NOCTÚA**  
OUT



**ARA**  
OUT



**DRACO**  
OUT

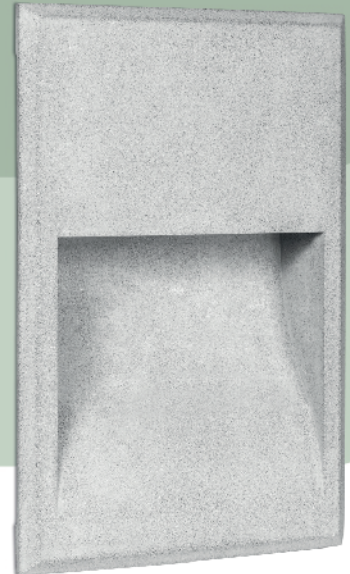

**ZAHARA**  
OUT

# REDUGER®

TECH SOLUTION UGR<19




Let's get brighter





## TECH SOLUTION UGR<19

before REDUGER



after REDUGER



BPM Lighting presenta el Sistema REDUGER a través de un dispositivo que añadido a nuestras luminarias focaliza el haz de luz y proporciona un UGR, 100% compatible con la normativa europea UNE 12464-1.

¡Descúbrelo!

BPM Lighting introduces REDUGER, a patented device that being added to our luminaires, focuses the light beam and provides an optimum UGR, 100% compatible with European standards UNE 12464-1

Find out!



## Let's get brighter


Es nuestra mentalidad, especialmente en estos tiempos de incertidumbre en los que trabajaremos juntos para salir más fuertes, más resistentes, más conectados, más empáticos, más comprometidos, más flexibles ... ¡MÁS BRILLANTES!  
¡Juntos, seremos más brillantes!

## Let's get brighter

Let's get brighter, It's our mindset.

In these times of uncertainty, we will work together to come out stronger, more resilient, more connected, more thoughtful, more committed, more flexible... BRIGHTER!  
Together, we will get brighter!

let's co-create  
with ALARIK SLIM

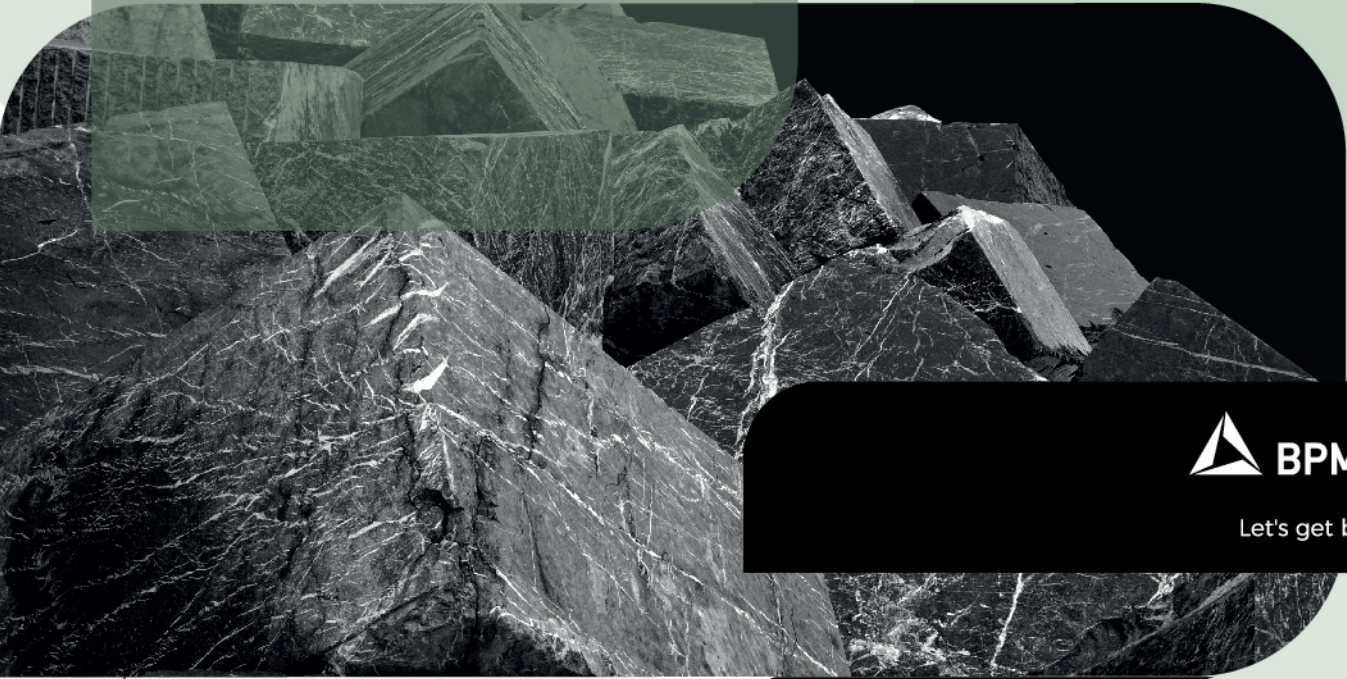

 **BPM**Lighting®

Let's get brighter





20224.TR

20224.SR  
20224.PN

# ALARIK SLIM

Infinite possibilities in mini version



Let's get brighter



Let's get brighter

# ALARIK SLIM

Infinite possibilities in mini version



### GENERAL DETAILS



REFERENCE:	20224
INSTALLATION:	Trimless   Surface   Pendant
EXTERNAL FINISH:	White · Black
MATERIAL:	Aluminium
IP DEGREE:	IP40
IK:	IK06
FORM:	Square
REGULATION:	DALI   1..10
UTILIZATION:	Indoor
WARRANTY:	5 years

### GENERAL DIMENSIONS



<b>20224.SR</b>	: 26.5 X 54 X L mm.
<b>20224.PN</b>	: 26.5 X 54 X L mm.
<b>20224.TR</b>	: ext ( 70.1 X 54 ) 26.5 X 54 X L mm.

MAXIMUM CABLE LENGTH 2000 mm

20224.SR  
20224.PN



20224.TR

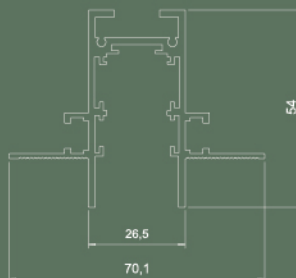





SLIM PATRICIA  
S | M | L

FOR ALARIK SLIM

 **BPM**Lighting®

Let's get brighter

CE 



Let's get brighter

# SLIM PATRICIA

S | M | L

FOR ALARIK SLIM




## GENERAL DETAILS

REFERENCE:	11544 S   11545 M   11546 L
INSTALLATION:	ALARIK SLIM MODULE
EXTERNAL FINISH:	.BK Black   .W White
MATERIAL:	Aluminium
IP DEGREE:	IP20
IK:	IK06
FORM:	Round
LIGHT DIRECTION:	Oscillation
BEAM ANGLE S   M :	15°   38°   60°
BEAM ANGLE L :	15° - 36°   36° - 60°

## GENERAL DIMENSIONS

DIMENSIONS:	CROQUIS
MINIMUM DISTANCE TO ILLUMINATED OBJECT:	0.5 m

## ELECTRICAL DETAILS

LAMP:	LED
LED TYPE:	BRIDGELUX
PROTECTION CLASS:	
ENERGETIC EFFICIENCY:	A+
CONSTANT VOLTAGE:	48 V
VOLTAGE:	230 V
LIFE TIME:	50.000 h
LUMEN MAINTENANCE:	L80_B10: 50000
CRI:	≥90
MACADAM:	<3

CE 




Let's get brighter

# SLIM PATRICIA S | M | L

FOR ALARIK SLIM




SLIM PATRICIA S 11544

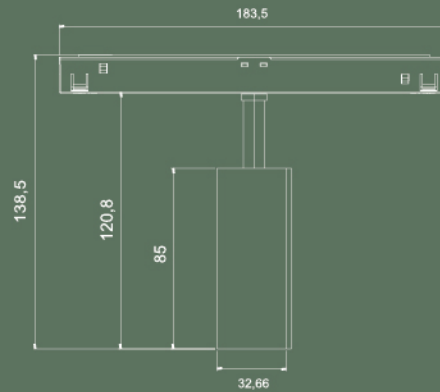

		EFFICIENCY	LUMENS
POWER	8W	EFF 2700K: 75 lm/w	2700K lm: 579 lm
		EFF 3000K: 79 lm/w	3000K lm: 607 lm
		EFF 4000K: 90 lm/w	4000K lm: 695 lm



SLIM PATRICIA M 11545

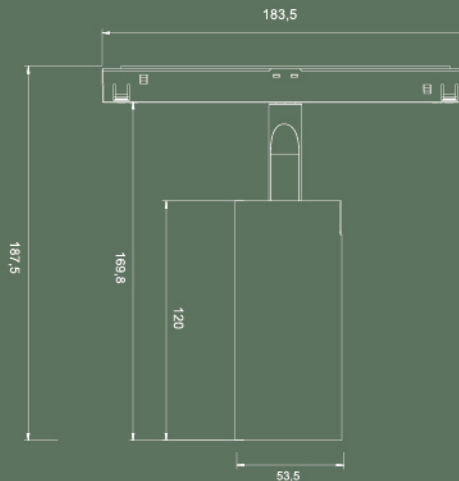

		EFFICIENCY	LUMENS
POWER	13W	EFF 2700K: 90 lm/w	2700K lm: 1173 lm
		EFF 3000K: 90 lm/w	3000K lm: 1181 lm
		EFF 4000K: 93 lm/w	4000K lm: 1207 lm

CE 

 **BPM**Lighting®


Let's get brighter

# SLIM PATRICIA S | M | L


FOR ALARIK SLIM



SLIM PATRICIA L 11546

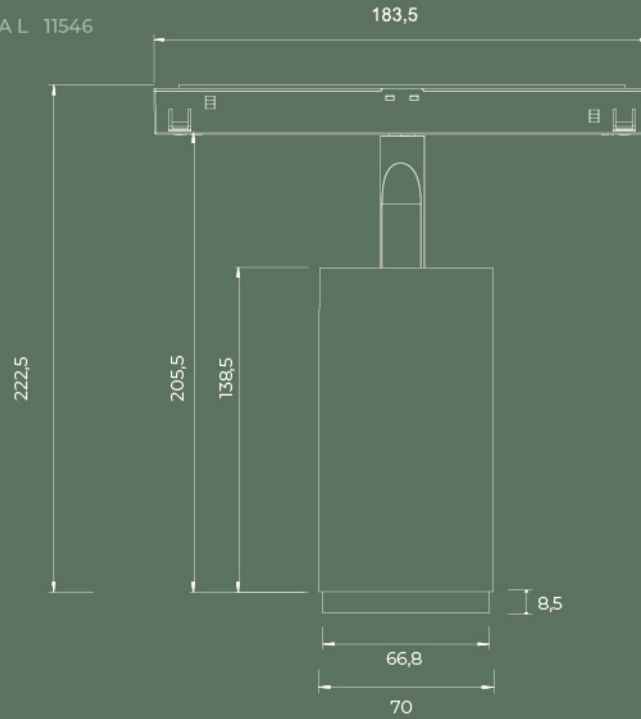

POWER	22W	EFFICIENCY		LUMENS	
		EFF 2700K:	92 lm/w	2700K lm:	2038 lm
		EFF 3000K:	104 lm/w	3000K lm:	2254 lm
		EFF 4000K:	105 lm/w	4000K lm:	2320 lm

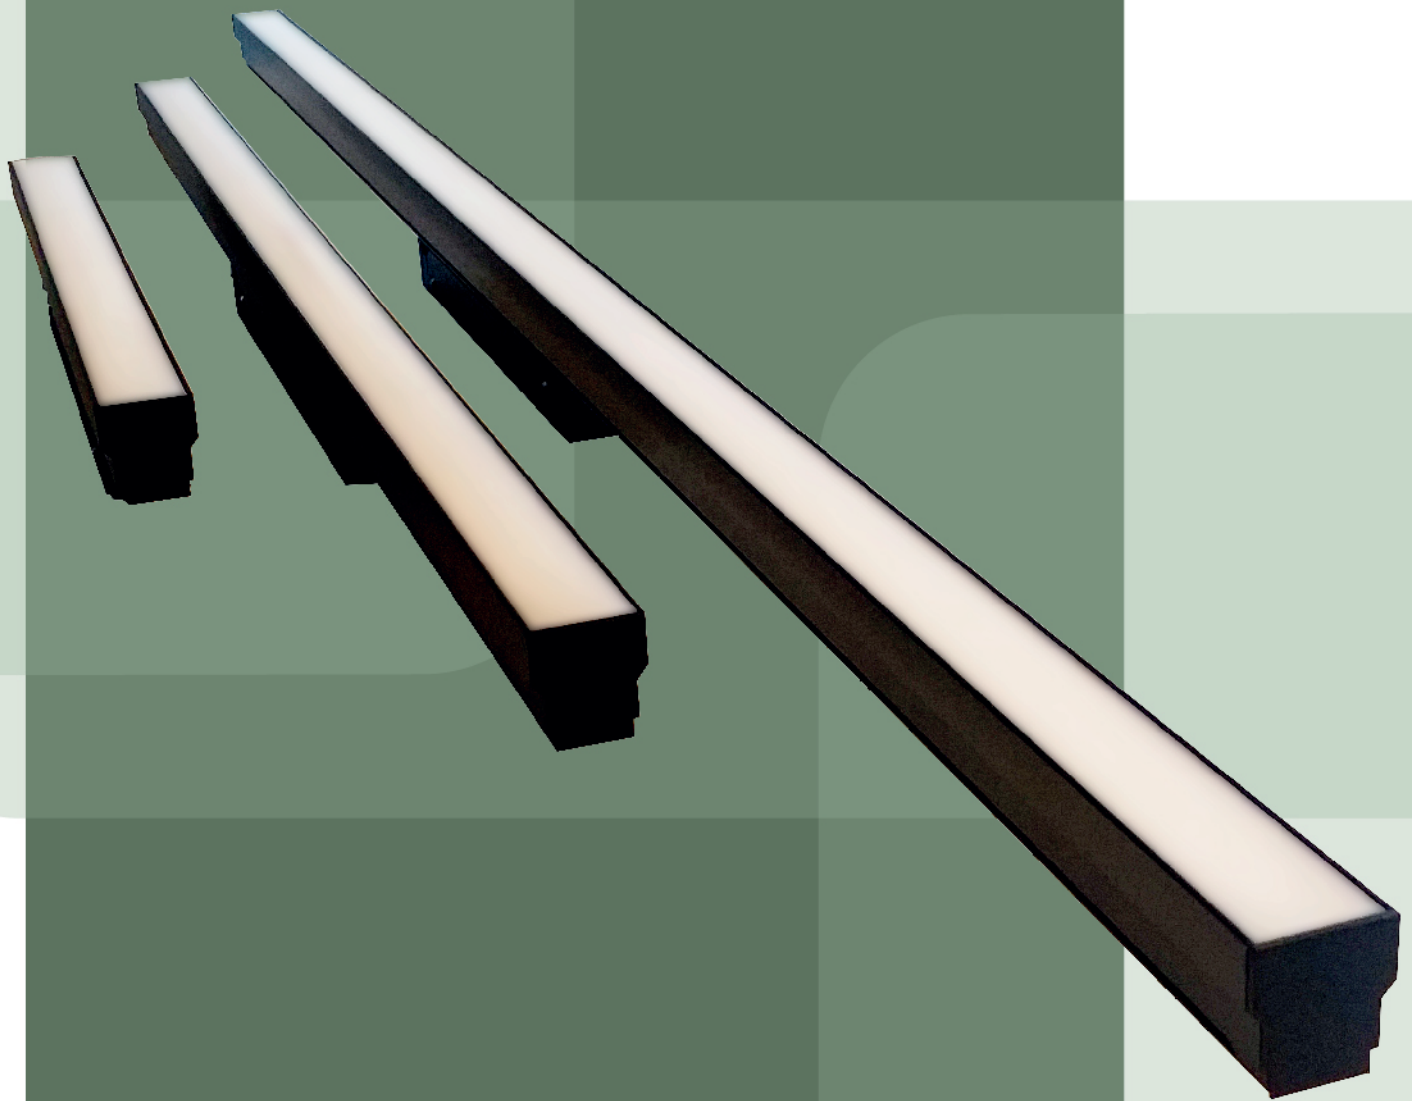

SLIM LED MODULES  
FOR ALARIK SLIM



Let's get brighter



Let's get brighter

## SLIM LED MODULES

FOR ALARIK SLIM

### GENERAL DETAILS

REFERENCE:	11549.01   11549.02   11549.03
INSTALLATION:	ALARIK SLIM MODULE
EXTERNAL FINISH:	.BK Black
MATERIAL:	Aluminium
IP DEGREE:	IP20
IK:	IK06
LIGHT DIRECTION:	Fixed
OPTIC COVER:	Opal

### GENERAL DIMENSIONS

DIMENSIONS:	11549.01: 303 X 43 X 22,8 mm. 11549.02 : 603 X 43 X 22,8 mm. 11549.03 : 903 X 43 X 22,8 mm.
MINIMUM DISTANCE TO ILLUMINATED OBJECT:	0,5 m

### ELECTRICAL DETAILS

LAMP:	LED
LED TYPE:	OSRAM
PROTECTION CLASS:	
ENERGETIC EFFICIENCY:	A+
CONSTANT VOLTAGE:	48 V
VOLTAGE:	230 V
LIFE TIME:	35.000 h
LUMEN MAINTENANCE:	L80_B10: 35000
CRI:	≥90
MACADAM:	<3





Let's get brighter

# SLIM LED MODULES

FOR ALARIK SLIM




11549.01



POWER	8,9W	EFFICIENCY		LUMENS	
		EFF 2700K:	62 lm/w	2700K lm:	558 lm
		EFF 3000K:	63.6 lm/w	3000K lm:	560 lm
		EFF 4000K:	80 lm/w	4000K lm:	604 lm

15549.02

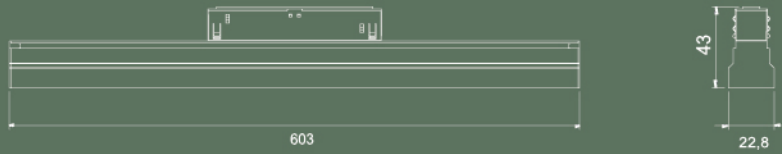


POWER	17.8W	EFFICIENCY		LUMENS	
		EFF 2700K:	62 lm/w	2700K lm:	1115 lm
		EFF 3000K: <td>63 lm/w</td> <td>3000K lm: <td>1120 lm</td> </td>	63 lm/w	3000K lm: <td>1120 lm</td>	1120 lm
		EFF 4000K: <td>80 lm/w</td> <td>4000K lm: <td>1208 lm</td> </td>	80 lm/w	4000K lm: <td>1208 lm</td>	1208 lm

15549.03



POWER	20.63W	EFFICIENCY		LUMENS	
		EFF 2700K:	62 lm/w	2700K lm:	1670 lm
		EFF 3000K: <td>63 lm/w</td> <td>3000K lm: <td>1680 lm</td> </td>	63 lm/w	3000K lm: <td>1680 lm</td>	1680 lm
		EFF 4000K: <td>80 lm/w</td> <td>4000K lm: <td>1812 lm</td> </td>	80 lm/w	4000K lm: <td>1812 lm</td>	1812 lm

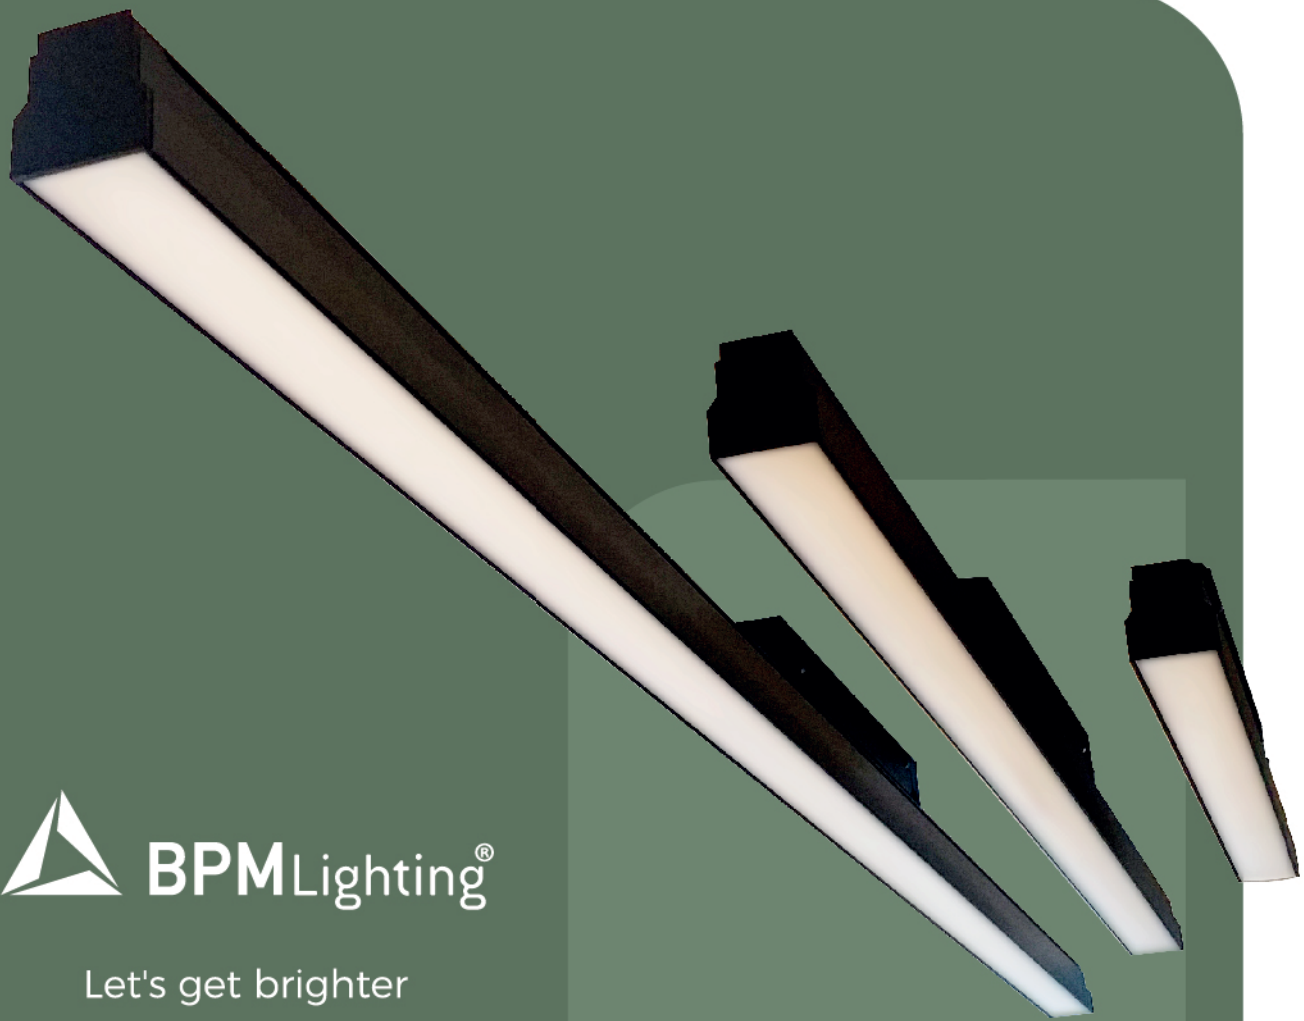

 **BPM**Lighting®

Let's get brighter





SLIM LENSES  
FOR ALARIK SLIM



Let's get brighter

CE 



Let's get brighter



## SLIM LENSES

FOR ALARIK SLIM


### GENERAL DETAILS

REFERENCE:	11548.06   11548.12
INSTALLATION:	ALARIK SLIM MODULE
EXTERNAL FINISH:	.BK Black
MATERIAL:	Aluminium
IP DEGREE:	IP20
IK:	IK06
BEAM ANGLE:	15°   38°
LIGHT DIRECTION:	Fixed

### GENERAL DIMENSIONS

DIMENSIONS:	* CROQUIS
MINIMUM DISTANCE TO ILLUMINATED OBJECT:	0.5 m

### ELECTRICAL DETAILS

LAMP:	LED
LED TYPE:	OSRAM
PROTECTION CLASS:	
ENERGETIC EFFICIENCY:	A+
CONSTANT VOLTAGE:	48 V
VOLTAGE:	230 V
LIFE TIME:	35.000 h
LUMEN MAINTENANCE:	L80_B10: 35000
CRI:	≥90
MACADAM:	<3




Let's get brighter

# SLIM LENSES

FOR ALARIK SLIM




11548.12

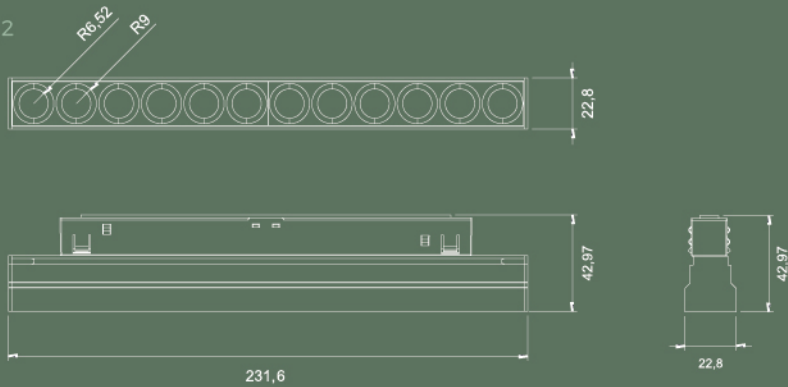


POWER		EFFICIENCY	LUMENS
18 W	EFF 2700K:	74 lm/w	2700K lm: 1320 lm
	EFF 3000K:	83 lm/w	3000K lm: 1511 lm
	EFF 4000K:	93 lm/w	4000K lm: 1654 lm

11548.06

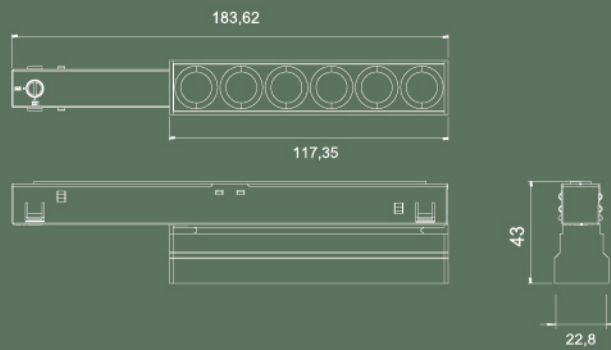

POWER		EFFICIENCY	LUMENS
9 W	EFF 2700K:	74 lm/w	2700K lm: 660 lm
	EFF 3000K:	83 lm/w	3000K lm: 750 lm
	EFF 4000K:	93 lm/w	4000K lm: 827 lm

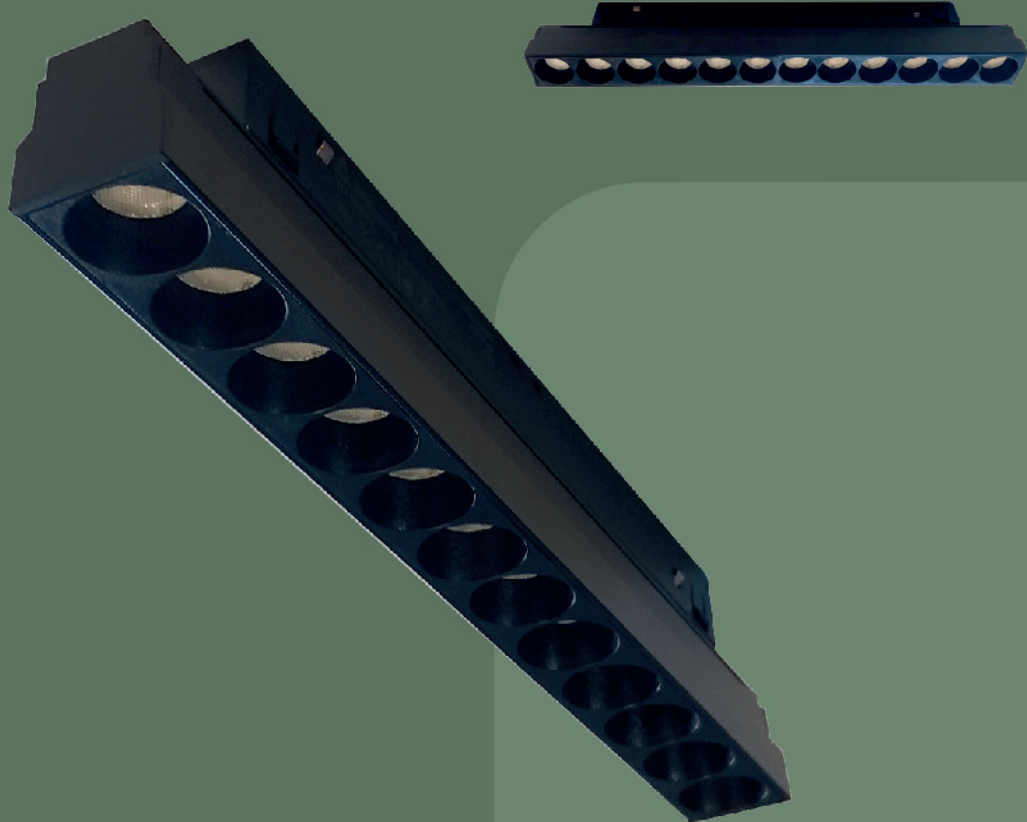

Let's get brighter



SLIM MOTION LENSES  
FOR ALARIK SLIM



Let's get brighter



Let's get brighter

# SLIM MOTION LENSES

FOR ALARIK SLIM



## GENERAL DETAILS


REFERENCE:	11547
INSTALLATION:	ALARIK SLIM MODULE
EXTERNAL FINISH:	.BK Black
MATERIAL:	Aluminium
IP DEGREE:	IP20
IK:	IK06
BEAM ANGLE:	15°   38°
LIGHT DIRECTION:	Oscillation

## GENERAL DIMENSIONS

DIMENSIONS:	* CROQUIS
MINIMUM DISTANCE TO ILLUMINATED OBJECT:	0.5 m

## ELECTRICAL DETAILS

LAMP:	LED
LED TYPE:	OSRAM
PROTECTION CLASS:	⚡
ENERGETIC EFFICIENCY:	A+
CONSTANT VOLTAGE:	48 V
VOLTAGE:	230 V
LIFE TIME:	35.000 h
LUMEN MAINTENANCE:	L80_B10: 35000
CRI:	≥90
MACADAM:	<3

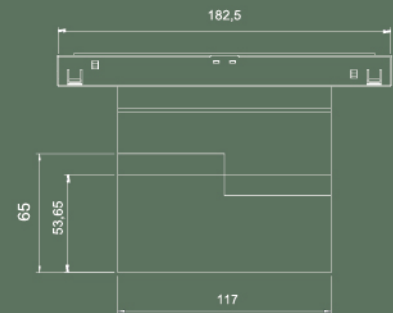

POWER	9,18 W	EFFICIENCY		LUMENS	
		EFF 2700K:	74 lm/w	2700K lm:	660 lm
		EFF 3000K:	82,86 lm/w	3000K lm:	750 lm
		EFF 4000K:	93 lm/w	4000K lm:	827 lm



## SLIM WALL WASHER


FOR ALARIK SLIM

 **BPM**Lighting®

Let's get brighter



Let's get brighter



# SLIM WALL WASHER

FOR ALARIK SLIM


## GENERAL DETAILS



REFERENCE: 11550  
 INSTALLATION: ALARIK SLIM MODULE  
 EXTERNAL FINISH: .BK Black  
 MATERIAL: Aluminium  
 IP DEGREE: IP20  
 IK: IK06  
 BEAM ANGLE: Wall washer  
 LIGHT DIRECTION: Fixed

## GENERAL DIMENSIONS

DIMENSIONS: \* CROQUIS  
 MINIMUM DISTANCE TO ILLUMINATED OBJECT: 0.5 m

## ELECTRICAL DETAILS

LAMP: LED  
 LED TYPE: CREE  
 PROTECTION CLASS:   
 ENERGETIC EFFICIENCY: A+  
 CONSTANT VOLTAGE: 48 V  
 VOLTAGE: 230 V  
 LIFE TIME: 35.000 h  
 LUMEN MAINTENANCE: L80\_B10: 35000  
 CRI: ≥90  
 MACADAM: <3

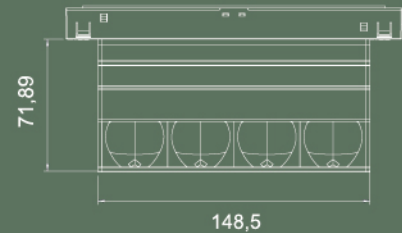

		EFFICIENCY	LUMENS
POWER	13W	EFF 2700K: 85 lm/w	2700K lm: 1100 lm
		EFF 3000K: 87 lm/w	3000K lm: 1169 lm
		EFF 4000K: 100 lm/w	4000K lm: 1251 lm





ALARIK SLIM  
ACCESORIES




Let's get brighter

# ALARIK SLIM

## ACCESORIES


### 10246.CA

POWER FEEDER UNIT  
2000 x 17 x 16 BLACK

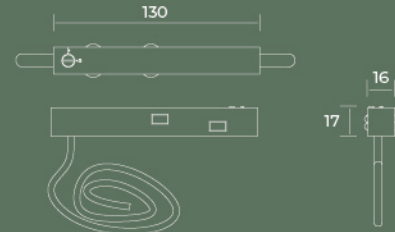

### 10246.UA

ANGLE FLEXIBLE JOINT  
130 x 17 x 16 BLACK

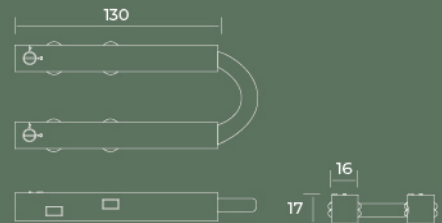


### 10246.UL

LINEAR JOINT  
160 x 17 x 22 BLACK




### 10246.PK

PENDANT KIT  
( CEILING FASTENER  
CABLE SUSPENSION )  
2000 x 35 x 22,5 BLACK



### 10246.PKDB


PENDANT KIT  
WITH DRIVER BOX  
2000 x 36 x 54 BLACK

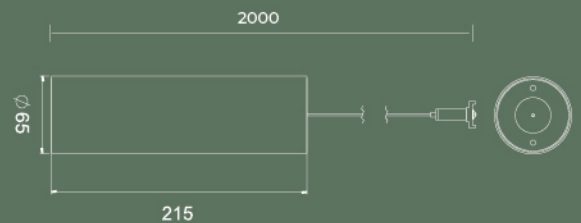

## ALARIK SLIM COVER KIT

### CK29.TR


COVER KIT  
TRIMLESS



### CK29.SR

### CK29.PN

COVER KIT  
SURFACE  
PENDANT





KIERA  
Serene and Atemporal

 **BPM**Lighting®

Let's get brighter

CE 



Let's get brighter



# KIERA

FAMILY


## GENERAL DETAILS

REFERENCE:	20204 S   M   L
INSTALLATION:	Pendant
EXTERNAL FINISH:	White · Black
MATERIAL:	Aluminium
IP DEGREE:	IP20
FORM:	Round
IK:	IK06
LIGHT DIRECTION:	Fixed
REGULATION:	1..10V · Push · DALI · Non Dimm
BEAM ANGLE:	38°
UTILIZATION:	Indoor
WARRANTY:	5 years

## GENERAL DIMENSIONS

	20204 S : Ø56 x 57 mm
	20204 M : Ø75 x 81 mm
	20204 L : Ø100 x 114,8 mm
MAXIMUM CABLE LENGTH	3000 mm
MINIMUM DISTANCE TO ILLUMINATED OBJECT:	0.5 m

## ELECTRICAL DETAILS

LAMP:	LED
PROTECTION CLASS:	
ENERGETIC EFFICIENCY:	A++
DRIVER:	Included ( remote if dimmable )
I:	S: 500 mA M: 700 mA L: 500 mA
VOLTAGE:	220 - 240 V
LIFE TIME:	35.000 h
LUMEN MAINTENANCE:	L80_B10: 35000 h
CRI:	>90
MACADAM:	<3
UGR:	20

CE 




Let's get brighter

# KIERA


FAMILY

## ELECTRICAL DETAILS


POWER	S	M	L
WATTS:	4,5 W	7 W	18 W
EFFICIENCY			
EFF 2700K:	78 lm/w	81 lm/w	70 lm/w
EFF 3000K:	79 lm/w	82 lm/w	83 lm/w
EFF 4000K:	82 lm/w	85 lm/w	96 lm/w
LUMENS			
2700K lm:	411 lm	572 lm	1396 lm
3000K lm:	447 lm	574 lm	1655 lm
4000K lm:	488 lm	594 lm	1962 lm

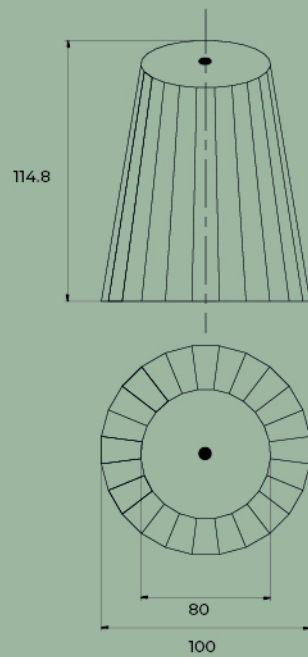

20204 L

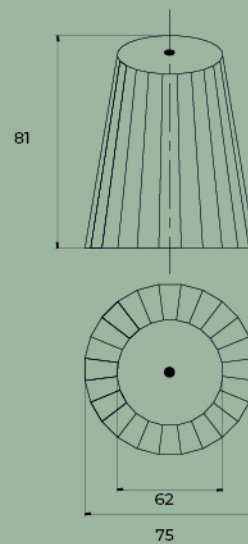

20204 M

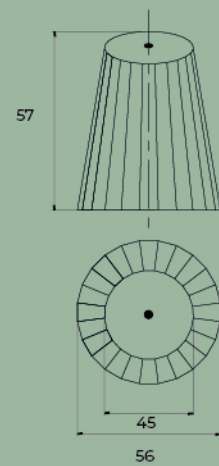

20204 S



# KIERA

FAMILY

 **BPM**Lighting®

Let's get brighter



ALBERTA  
due

 **BPM**Lighting®

Let's get brighter



CE 



Let's get brighter



#### MEASURES



# ALBERTA

due

#### GENERAL DETAILS

REFERENCE: 10250  
INSTALLATION: Pendant  
EXTERNAL FINISH: White · Black · Anodized grey · Gold · Blue · Aqua · Red · Flamingo · Green · Orange · Pink · Copper · Gold leaf · Silver leaf

MATERIAL: Aluminium

IP DEGREE: IP40

IK: IK06

FORM: Round

LIGHT DIRECTION: Fixed

REGULATION: 1..10V · Push · DALI

OPTIC COVER: Silicone

UTILIZATION: Indoor

WARRANTY: 5 years

#### GENERAL DIMENSIONS

HEIGHT: 30 mm

EXT. DIAMETER: Ø 350 | 450 | 650 | 950 | 1250 mm

MAXIMUM CABLE LENGTH: 3000 mm

MINIMUM DISTANCE TO ILLUMINATED OBJECT: 0.5 m

#### ELECTRICAL DETAILS

LAMP: LED

LED TYPE: STRIPE LED

PROTECTION CLASS: 

ENERGETIC EFFICIENCY: A+

DRIVER: Included Remote

PF: 0.9

CONSTANT VOLTAGE: 24 V

VOLTAGE: 230 V

LIFE TIME: 35.000 h

LUMEN MAINTENANCE: L80\_B10 / 35000 h

CRI: ≥ 80

MACADAM: 3




CE 





Let's get brighter

# ALBERTA

due




## MEASURES



## ELECTRICAL DETAILS

POWER	Ø 350	Ø 450	Ø 650	Ø 950	Ø 1250
	HI	HI	HI	HI	HI
WATTS:	28	37	56	83	110
EFFICIENCY					
EFF 2700K:	120 lm/w	120 lm/w	120 lm/w	120 lm/w	120 lm/w
EFF 3000K:	121 lm/w	121 lm/w	121 lm/w	121 lm/w	121 lm/w
EFF 4000K:	129 lm/w	129 lm/w	129 lm/w	129 lm/w	129 lm/w
INTERNAL LUMENS					
2700K lm:	3419 lm	4507 lm	6685 lm	9951 lm	13108 lm
3000K lm:	3436 lm	4531 lm	6720 lm	10003 lm	13177 lm
4000K lm:	3661 lm	4828 lm	7160 lm	10658 lm	14040 lm
EXTERNAL LUMENS					
2700K lm:	3419 lm	4507 lm	6685 lm	9951 lm	13108 lm
3000K lm:	3436 lm	4531 lm	6720 lm	10003 lm	13177 lm
4000K lm:	3661 lm	4828 lm	7160 lm	10658 lm	14040 lm

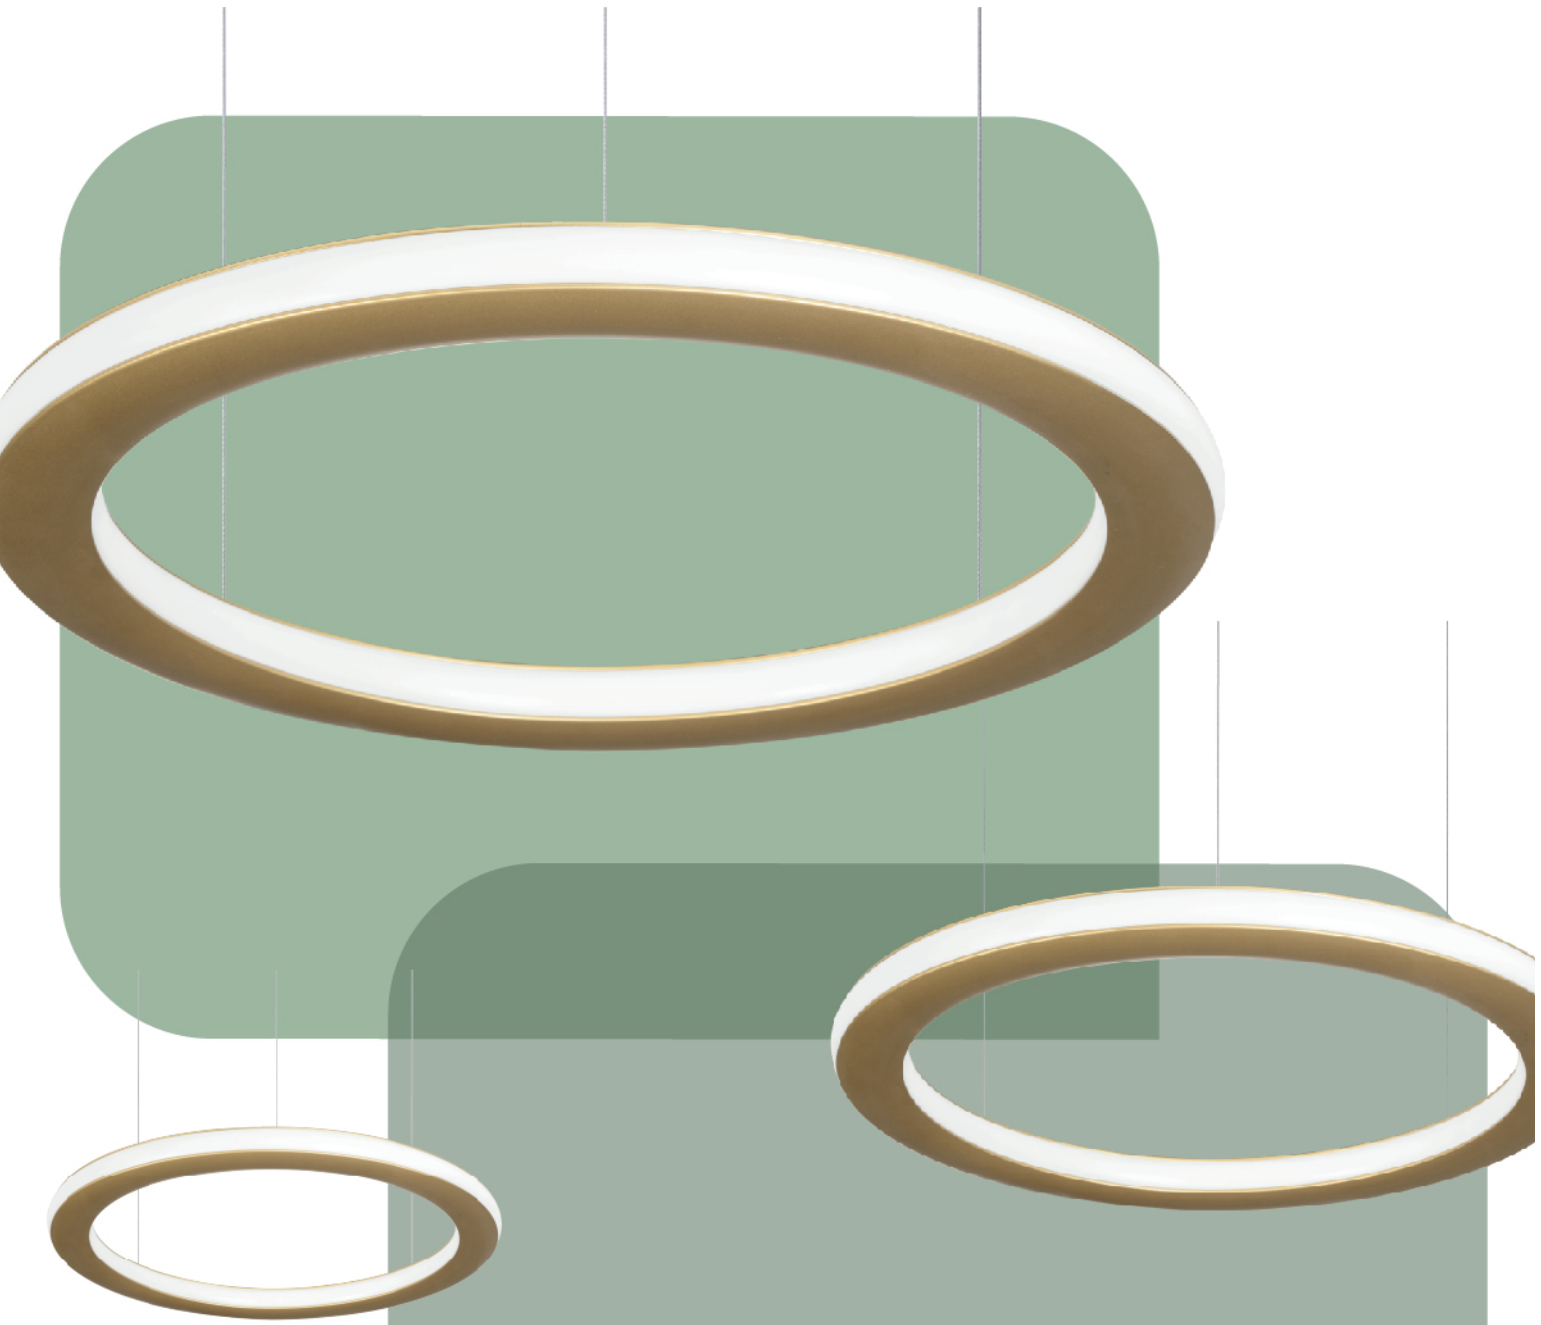

ALBERTA  
due

 **BPM**Lighting®

Let's get brighter



ALBERTA  
inside



Let's get brighter


CE 



Let's get brighter



#### MEASURES



# ALBERTA

inside

#### GENERAL DETAILS


REFERENCE: 10243  
INSTALLATION: Pendant  
EXTERNAL FINISH: White · Black · Anodized grey · Gold · Blue · Aqua · Red · Flamingo · Green · Orange · Pink · Copper · Gold leaf · Silver leaf

MATERIAL: Aluminium  
IP DEGREE: IP40  
IK: IK06  
FORM: Round  
LIGHT DIRECTION: Fixed  
REGULATION: 1..10V · Push · DALI  
OPTIC COVER: Silicone  
UTILIZATION: Indoor  
WARRANTY: 5 years

#### GENERAL DIMENSIONS

HEIGHT: 50 mm  
EXT. DIAMETER: Ø 350 | 450 | 650 | 950 | 1250 mm  
MAXIMUM CABLE LENGTH: 3000 mm  
MINIMUM DISTANCE TO ILLUMINATED OBJECT: 0.5 m

#### ELECTRICAL DETAILS

LAMP: LED  
LED TYPE: STRIPE LED  
PROTECTION CLASS:   
ENERGETIC EFFICIENCY: A+  
DRIVER: Included Remote  
PF: 0.9  
CONSTANT VOLTAGE: 24 V  
VOLTAGE: 230 V  
LIFE TIME: 35.000 h  
LUMEN MAINTENANCE: L80\_B10 / 35000 h  
CRI: ≥80  
MACADAM: 3

CE 



Let's get brighter

# ALBERTA


inside

## ELECTRICAL DETAILS

POWER	Ø 350		Ø 450		Ø 650		Ø 950		Ø 1250	
		HI		HI		HI		HI		HI
WATTS:		27		36		54		81		109
EFFICIENCY										
EFF 2700K:		120 lm/w		120 lm/w		120 lm/w		120 lm/w		120 lm/w
EFF 3000K:		121 lm/w		121 lm/w		121 lm/w		121 lm/w		121 lm/w
EFF 4000K:		129 lm/w		129 lm/w		129 lm/w		129 lm/w		129 lm/w
LUMENS										
2700K lm:		3266 lm		4355 lm		6532 lm		9798 lm		13065 lm
3000K lm:		3283 lm		4378 lm		6567 lm		9850 lm		13133 lm
4000K lm:		3498 lm		4664 lm		6996 lm		10495 lm		13993 lm




## MEASURES



# ALBERTA

INSIDE

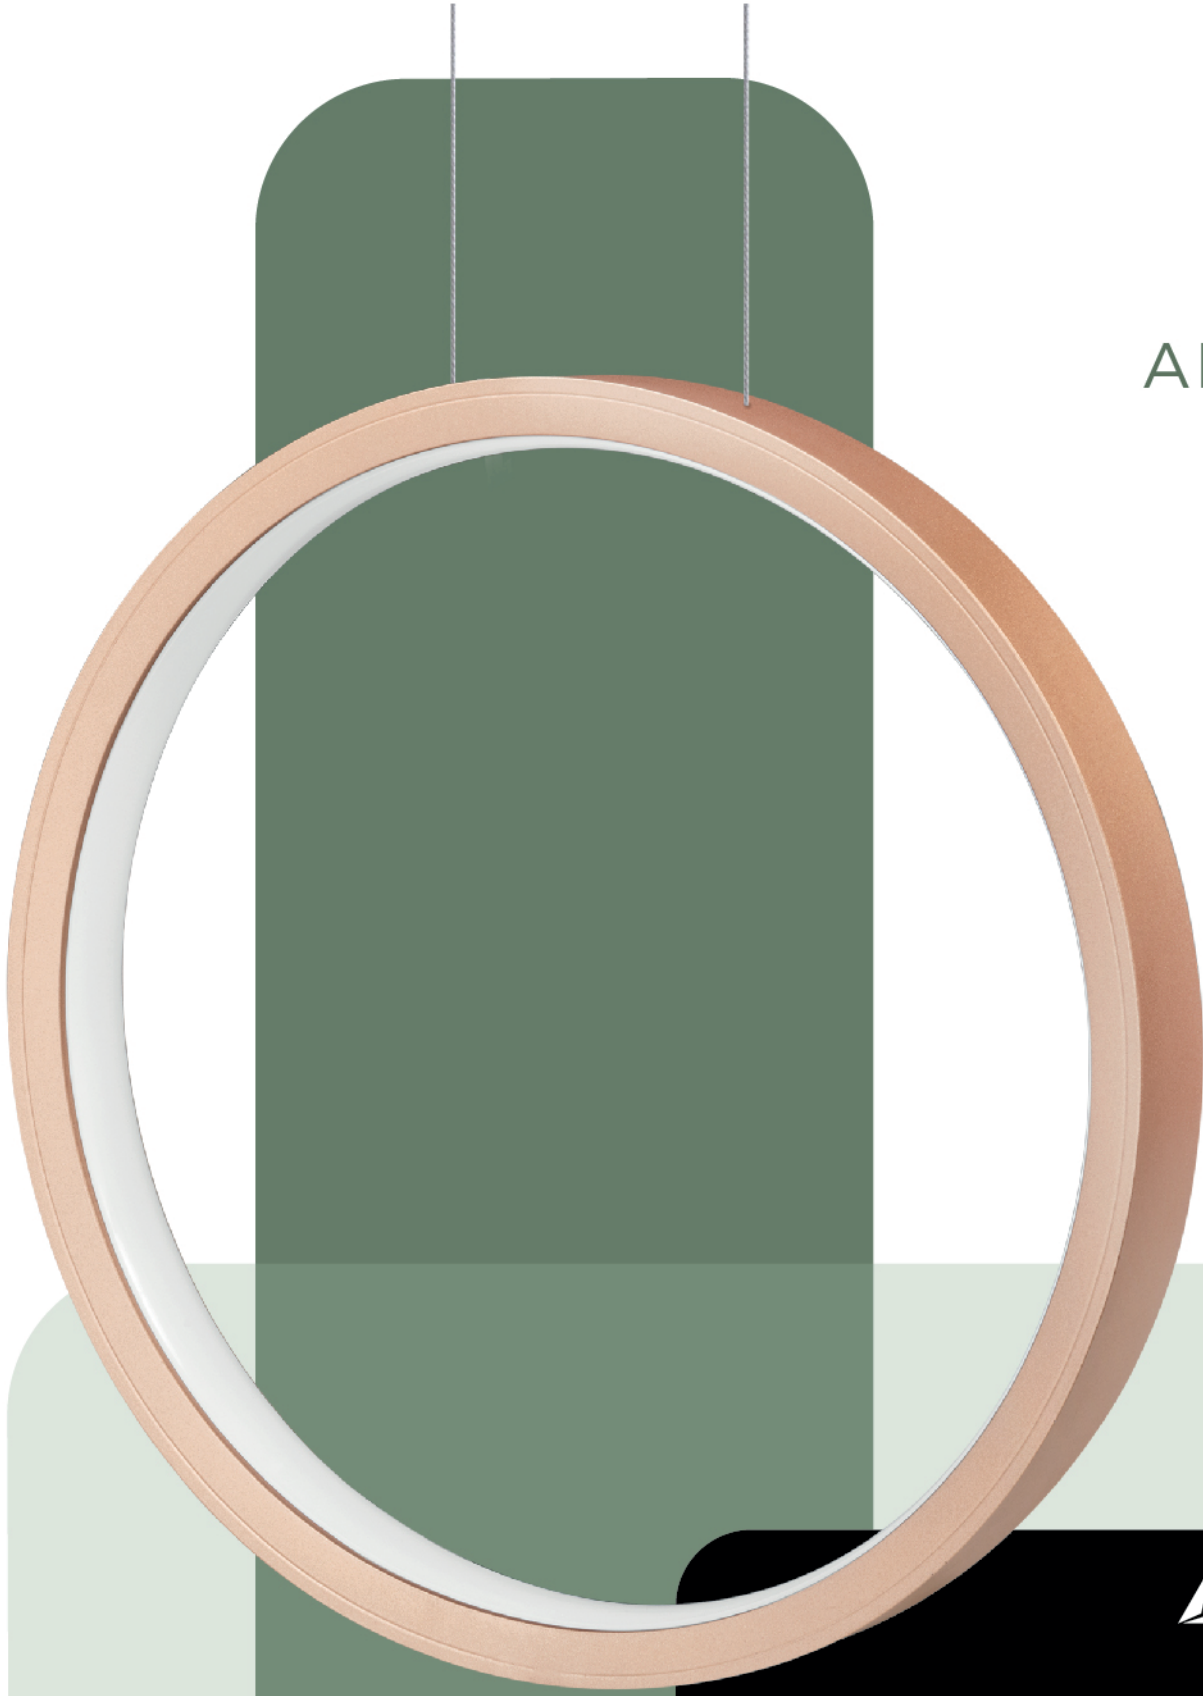

 **BPM**Lighting®

Let's get brighter



# GALANTA

EXALTS THE BEAUTY

 **BPM**Lighting®

Let's get brighter



Let's get brighter

# GALANTA

EXALTS THE BEAUTY



## GENERAL DETAILS


REFERENCE:	20221
INSTALLATION:	Pendant
EXTERNAL FINISH:	.BK Black   .W White   .SG Shiny Gold   .CH Chrome
MATERIAL:	Iron and Methacrylate
IP EXTERIOR:	IP20
FORM:	Round
IK:	IK06
LIGHT DIRECTION:	Fixed
REGULATION:	Non-dimm
UTILIZATION:	Indoor
WARRANTY:	5 years

## GENERAL DIMENSIONS

	60.5 X 60.5 X 200 mm.
MAXIMUM CABLE LENGTH	3000 mm
MINIMUM DISTANCE TO ILLUMINATED OBJECT:	0.5 m

## ELECTRICAL DETAILS


LAMP:	G9 LED
LAMP HOLDER:	G9
PROTECTION CLASS:	⊕
ENERGETIC EFFICIENCY:	A+
VOLTAGE:	220 - 240 V
LIFE TIME:	30.000 h
CRI:	90
POWER:	5 W

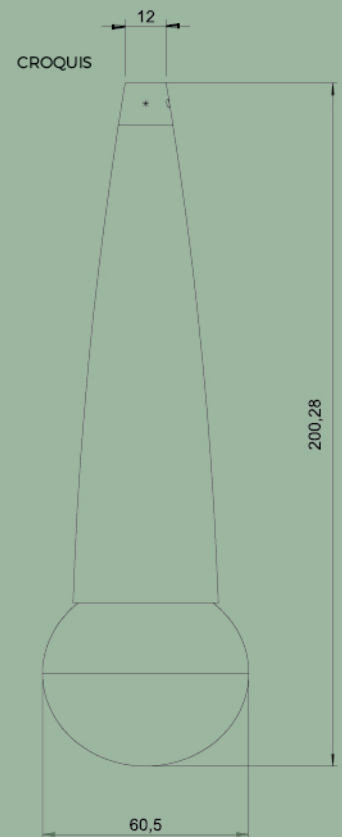





20206.03



20206.04



20206.10

# SUBLIM

The Elegance of Geometry



Let's get brighter



Let's get brighter



# SUBLIM

FAMILY

## GENERAL DETAILS

REFERENCE:	20206.03   20206.04   20206.10
INSTALLATION:	Pendant
EXTERNAL FINISH:	White · Black
MATERIAL:	Aluminium
IP DEGREE:	IP20
FORM:	Round
IK:	IK07
LIGHT DIRECTION:	Fixed
REGULATION:	1..10V · Push · DALI · Phase Cut
BEAM ANGLE:	36°
UTILIZATION:	Indoor
WARRANTY:	5 years

## GENERAL DIMENSIONS

	20206.03 : 39 X 39 X 270 mm.
	20206.04 : 39 X 39 X 400 mm.
	20206.10 : 39 X 39 X 1000 mm.
MAXIMUM CABLE LENGTH	3000 mm
MINIMUM DISTANCE TO ILLUMINATED OBJECT:	0.5 m

## ELECTRICAL DETAILS

LAMP:	LED
LED TYPE:	BRIDGELUX
PROTECTION CLASS:	ⓘ
ENERGETIC EFFICIENCY:	A+
DRIVER:	Included ( remote if dimmable )
I:	350 mA
VOLTAGE:	220 - 240 V
LIFE TIME:	50.000 h
LUMEN MAINTENANCE:	L80_B10 / 50000 h
CRI:	93
MACADAM:	<3
UGR:	<19



Let's get brighter


# SUBLIM

FAMILY

### ELECTRICAL DETAILS

POWER	
WATTS:	9 W
EFFICIENCY	
EFF 2700K:	62 lm/w
EFF 3000K:	62 lm/w
EFF 4000K:	68 lm/w
LUMENS	
2700K lm:	469 lm
3000K lm:	482 lm
4000K lm:	495.3 lm


### MEASURES (mm.)

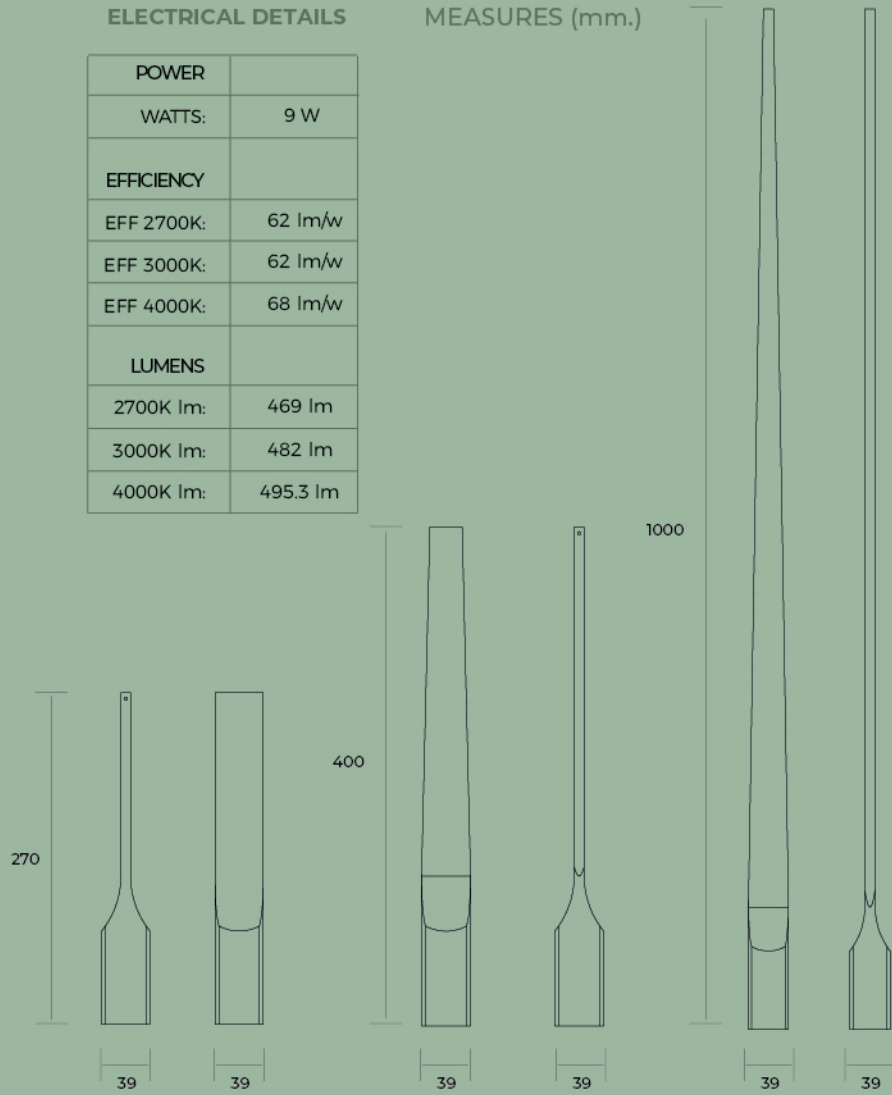

20206.03


20206.04

20206.10

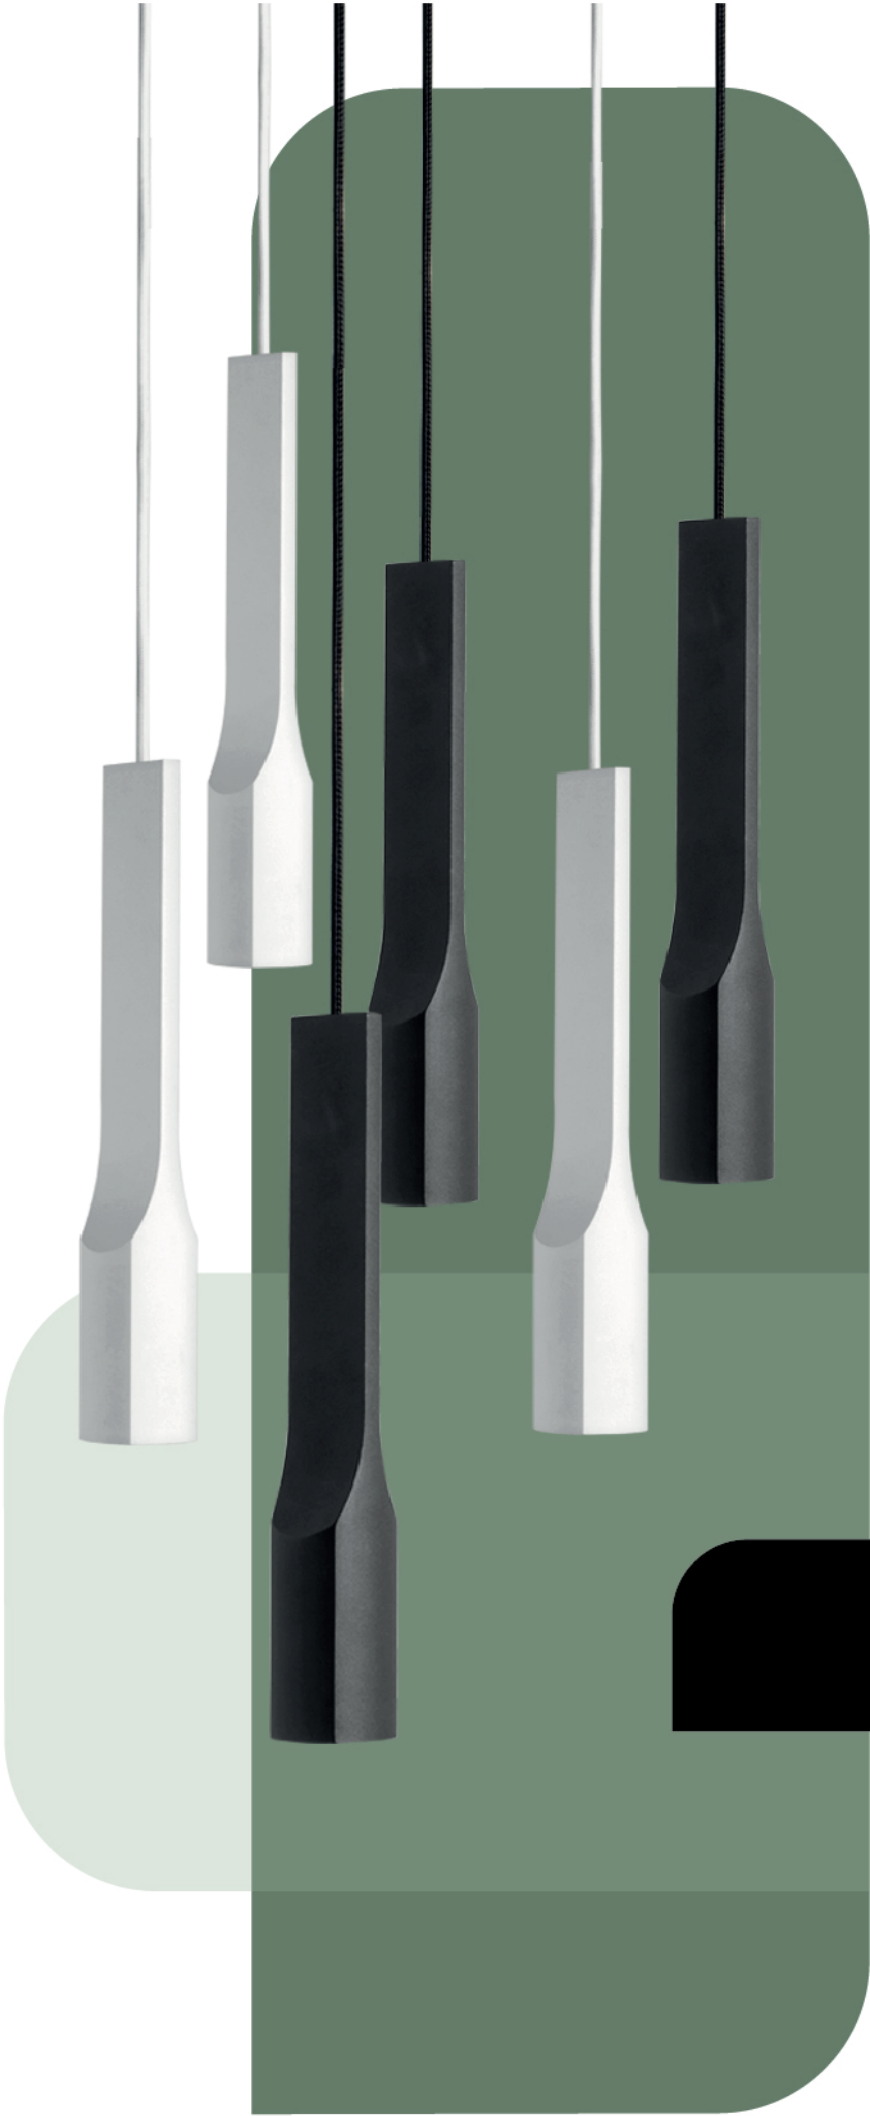

# SUBLIM

 **BPM**Lighting®  
Let's get brighter

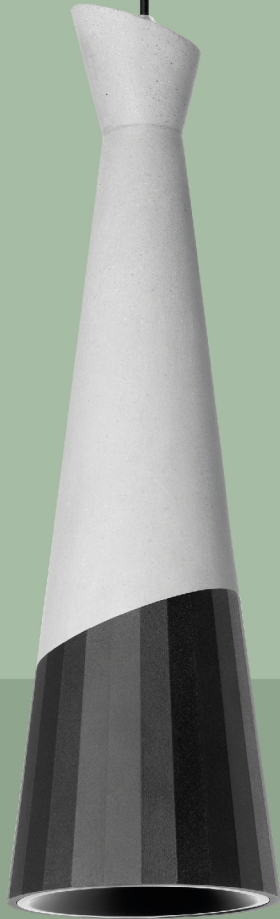

KIERA CEM  
SERENE AND ATEMPORAL

 **BPM**Lighting®

Let's get brighter

CE 

 **BPM**Lighting®

Let's get brighter



# KIERA CEM

S | M | L


## GENERAL DETAILS

REFERENCE:	20208 S   M   L
INSTALLATION:	Pendant
EXTERNAL FINISH:	Black
MATERIAL:	Aluminium and Cement
IP DEGREE:	IP20
FORM:	Round
IK:	IK06
LIGHT DIRECTION:	Fixed
REGULATION:	1..10V · Push · DALI · Non Dimm
BEAM ANGLE:	38°
UTILIZATION:	Indoor
WARRANTY:	5 years

## GENERAL DIMENSIONS

	20208 S : Ø56 x 197 mm
	20208 M : Ø75 x 269mm
	20208 L : Ø100 x 342 mm
MAXIMUM CABLE LENGTH	3000 mm
MINIMUM DISTANCE TO ILLUMINATED OBJECT:	0.5 m

## ELECTRICAL DETAILS

LAMP:	LED
PROTECTION CLASS:	
ENERGETIC EFFICIENCY:	A++
DRIVER:	Included ( remote if dimmable )
I:	S: 500 mA M: 700 mA L: 500 mA
VOLTAGE:	220 - 240 V
LIFE TIME:	35.000 h
LUMEN MAINTENANCE:	L80_B10: 35000 h
CRI:	>90
MACADAM:	<3
UGR:	20

CE 

 **BPM**Lighting®

Let's get brighter





# KIERA CEM



S | M | L

## ELECTRICAL DETAILS



POWER	S	M	L
WATTS:	4,5 W	7 W	18 W
EFFICIENCY			
EFF 2700K:	78 lm/w	81 lm/w	70 lm/w
EFF 3000K:	79 lm/w	82 lm/w	83 lm/w
EFF 4000K:	82 lm/w	85 lm/w	96 lm/w
LUMENS			
2700K lm:	411 lm	572 lm	1396 lm
3000K lm:	447 lm	574 lm	1655 lm
4000K lm:	488 lm	594 lm	1962 lm

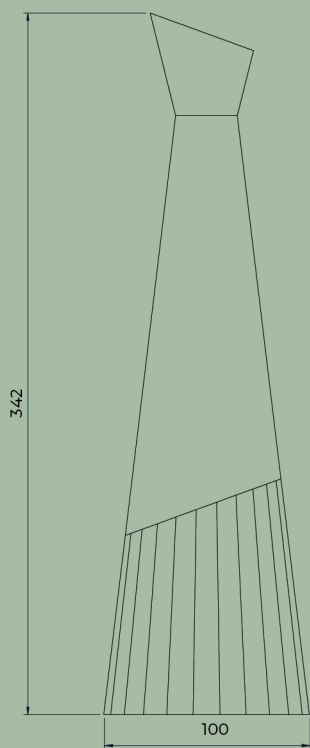

20208 L

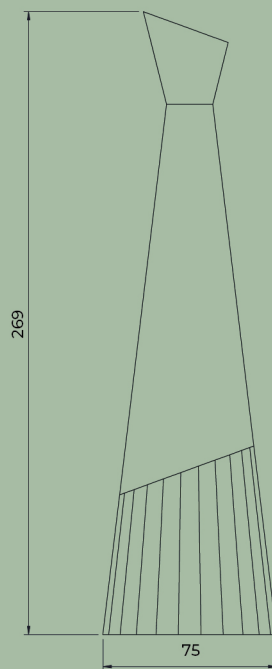

20208 M

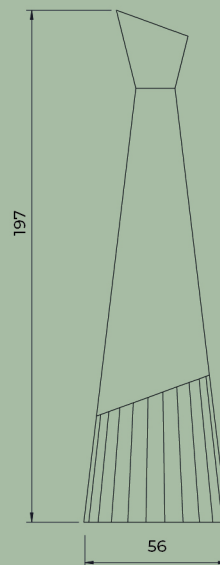

20208 S



IRIS  
Beyond the Light

 **BPM**Lighting®

Let's get brighter



CE 



Let's get brighter



# IRIS

Beyond the light


## GENERAL DETAILS

REFERENCE:	20203 S   M   L
INSTALLATION:	Pendant
EXTERNAL FINISH:	White · Black
MATERIAL:	Aluminium
IP DEGREE:	IP20
FORM:	Round
IK:	IK06
LIGHT DIRECTION:	Fixed
REGULATION:	1..10V · Push · DALI · Non Dimm
BEAM ANGLE:	38°
UTILIZATION:	Indoor
WARRANTY:	5 years

## GENERAL DIMENSIONS

	20203 S : Ø105 mm
	20203 M : Ø170 mm
	20203 L : Ø265 mm
MAXIMUM CABLE LENGTH	3000 mm
MINIMUM DISTANCE TO ILLUMINATED OBJECT:	0.5 m

## ELECTRICAL DETAILS

LAMP:	Bridgelux
PROTECTION CLASS:	
ENERGETIC EFFICIENCY:	A
DRIVER:	Included ( remote if dimmable )
I:	S: 500 mA M: 500 mA L: 700 mA
VOLTAGE:	220 - 240 V
LIFE TIME:	50.000 h
LUMEN MAINTENANCE:	L80_B10: 50000 h
CRI:	>90
MACADAM:	3

CE 



Let's get brighter




# IRIS

Beyond the light

## ELECTRICAL DETAILS

POWER	S	M	L
WATTS:	10	18	25
EFFICIENCY			
EFF 2700K:	70 lm/w	74 lm/w	76 lm/w
EFF 3000K:	73 lm/w	82 lm/w	85 lm/w
EFF 4000K:	78 lm/w	86 lm/w	88 lm/w
LUMENS			
2700K lm:	770 lm	1490 lm	2191 lm
3000K lm:	802 lm	1674 lm	2454 lm
4000K lm:	850 lm	1754 lm	2542 lm

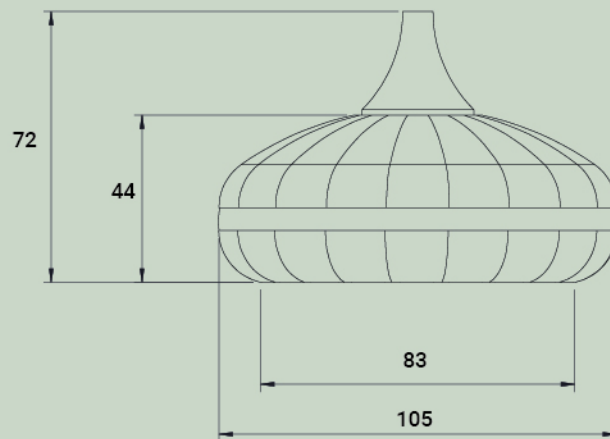

CE 





Let's get brighter



# IRIS

Beyond the light

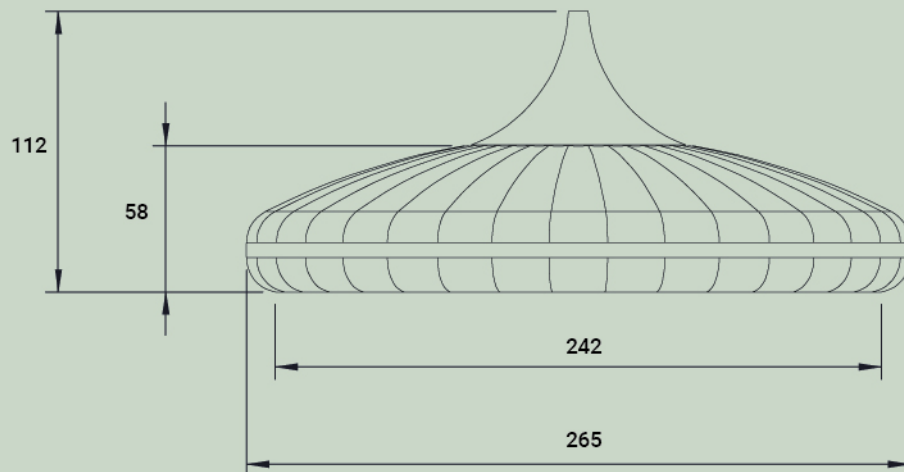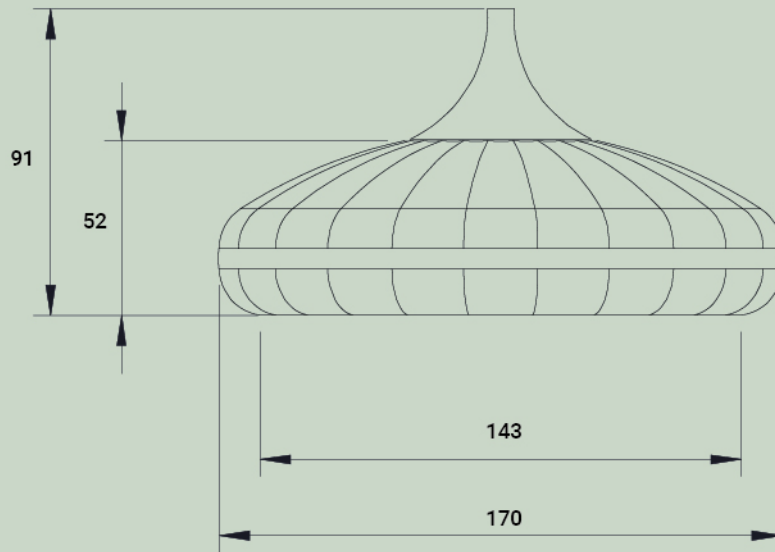



FACE  
The Contemporary Classic



Let's get brighter

CE 



Let's get brighter



# FACE

The Contemporary Classic


## GENERAL DETAILS

REFERENCE:	20205.30.PN   20205.40.PN 20207.30.PN   20207.40.PN 20205.10.SR   20205.10.RF
INSTALLATION:	Pendant   Surface   Recessed with Frame
EXTERNAL FINISH:	White · Black
MATERIAL:	Aluminium
IP DEGREE:	IP20
FORM:	Round
IK:	IK06
LIGHT DIRECTION:	Fixed
REGULATION:	1..10V · Push · DALI · Non Dimm
BEAM ANGLE:	38°
UTILIZATION:	Indoor
WARRANTY:	5 years

## GENERAL DIMENSIONS

	20205.30.PN: Ø40X300   20205.40.PN: Ø40X400 20207.30.PN: Ø60X300   20205.40.PN: Ø60X400 20205.10.SR: Ø40X140   20205.10.RF: Ø40X122
MAXIMUM CABLE LENGTH	3000 mm
MINIMUM DISTANCE TO ILLUMINATED OBJECT:	0.5 m

## ELECTRICAL DETAILS

LAMP:	Bridgelux
PROTECTION CLASS:	
ENERGETIC EFFICIENCY:	A
DRIVER:	Included ( remote if dimmable ) - * always remote
I:	20205.30.PN: 500mA   20205.40.PN: 500mA 20207.30.PN: 700mA   20205.40.PN: 700mA *20205.10.SR: 350mA   *20205.10.RF: 350mA
VOLTAGE:	220 - 240 V
LIFE TIME:	50.000 h
LUMEN MAINTENANCE:	L80_B10: 50.000 h
CRI:	>90
MACADAM:	20205.30.PN: 4   20205.40.PN: 4 20207.30.PN: 3   20205.40.PN: 3 20205.10.SR: 3   20205.10.RF: 3

CE 



Let's get brighter

# FACE

The Contemporary Classic

## ELECTRICAL DETAILS

POWER	20205.30.PN	20205.40.PN	20207.30.PN	20207.40.PN	20205.10.SR	20205.10.RF
WATTS:	12	12	18	18	8	8
EFFICIENCY						
EFF 2700K:	54 lm/w	54 lm/w	66 lm/w	66 lm/w	62 lm/w	62 lm/w
EFF 3000K:	54 lm/w	54 lm/w	68 lm/w	68 lm/w	62 lm/w	62 lm/w
EFF 4000K:	55 lm/w	55 lm/w	70 lm/w	70 lm/w	68 lm/w	68 lm/w
LUMENS						
2700K lm:	587 lm	587 lm	1056 lm	1056 lm	469 lm	469 lm
3000K lm:	588 lm	588 lm	1078 lm	1078 lm	482 lm	482 lm
4000K lm:	597 lm	597 lm	1099 lm	1099 lm	495 lm	495 lm



20205.30



20205.40




CE 

 **BPM Lighting®**

Let's get brighter

# FACE

The Contemporary Classic

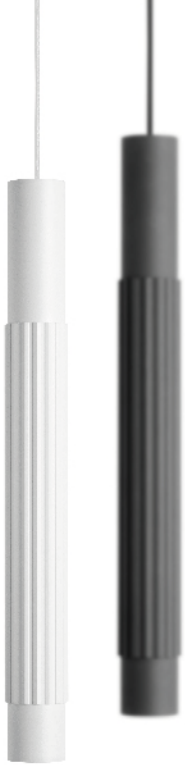

300

Ø60


20207.30



400

Ø60

20207.40

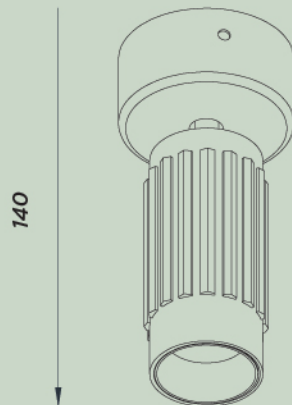


140

Ø40

20205.SR

92

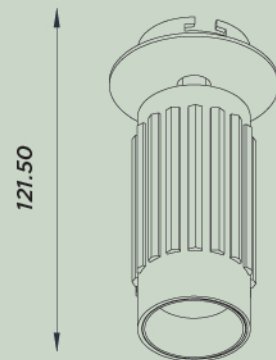

121.50

Ø40

20205.RF

92



 **BPM**Lighting®

Let's get brighter

## Let's play

Versatility. Adding or removing magnetic accessories to achieve the desired atmosphere. Playing with light has never been so simple.





Let's get brighter